

PERSIAN PORTORO

黑金木纹

MN727C

DESCRIPTION

设计灵感来自于谚语“十年树木，百年树人”。木的深沉黑色系光的流动形态，轻抚深思，可以感受到来自树木对历史的沉淀，如同日出太阳照射在树木上的金光，将轻盈与沉稳的气息融合汇入空间内。

The design inspiration comes from the saying "It takes ten years to grow a tree and a hundred years to bring up a generation of good men". When touching with the deep black wood and the flowing form of light and contemplating, you can feel the precipitation of history from trees. Just like the golden sunrise shining on the trees, the whole area would be filled with light luxury and calm temperament.

SPECIFICATION

Size: 1200X2700X6mm
108" X 48" X 1/4"


干粒度 / Nanotech Polished

6mm

ITEM NO.


MN727C#271206

FACE CONTINUITY

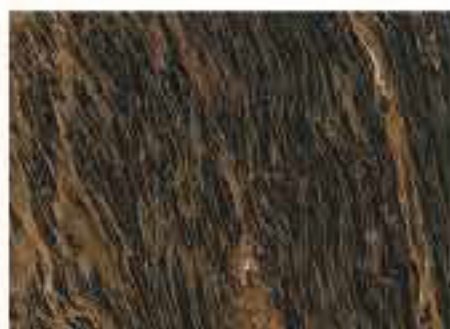

• MARBLE SERIES •



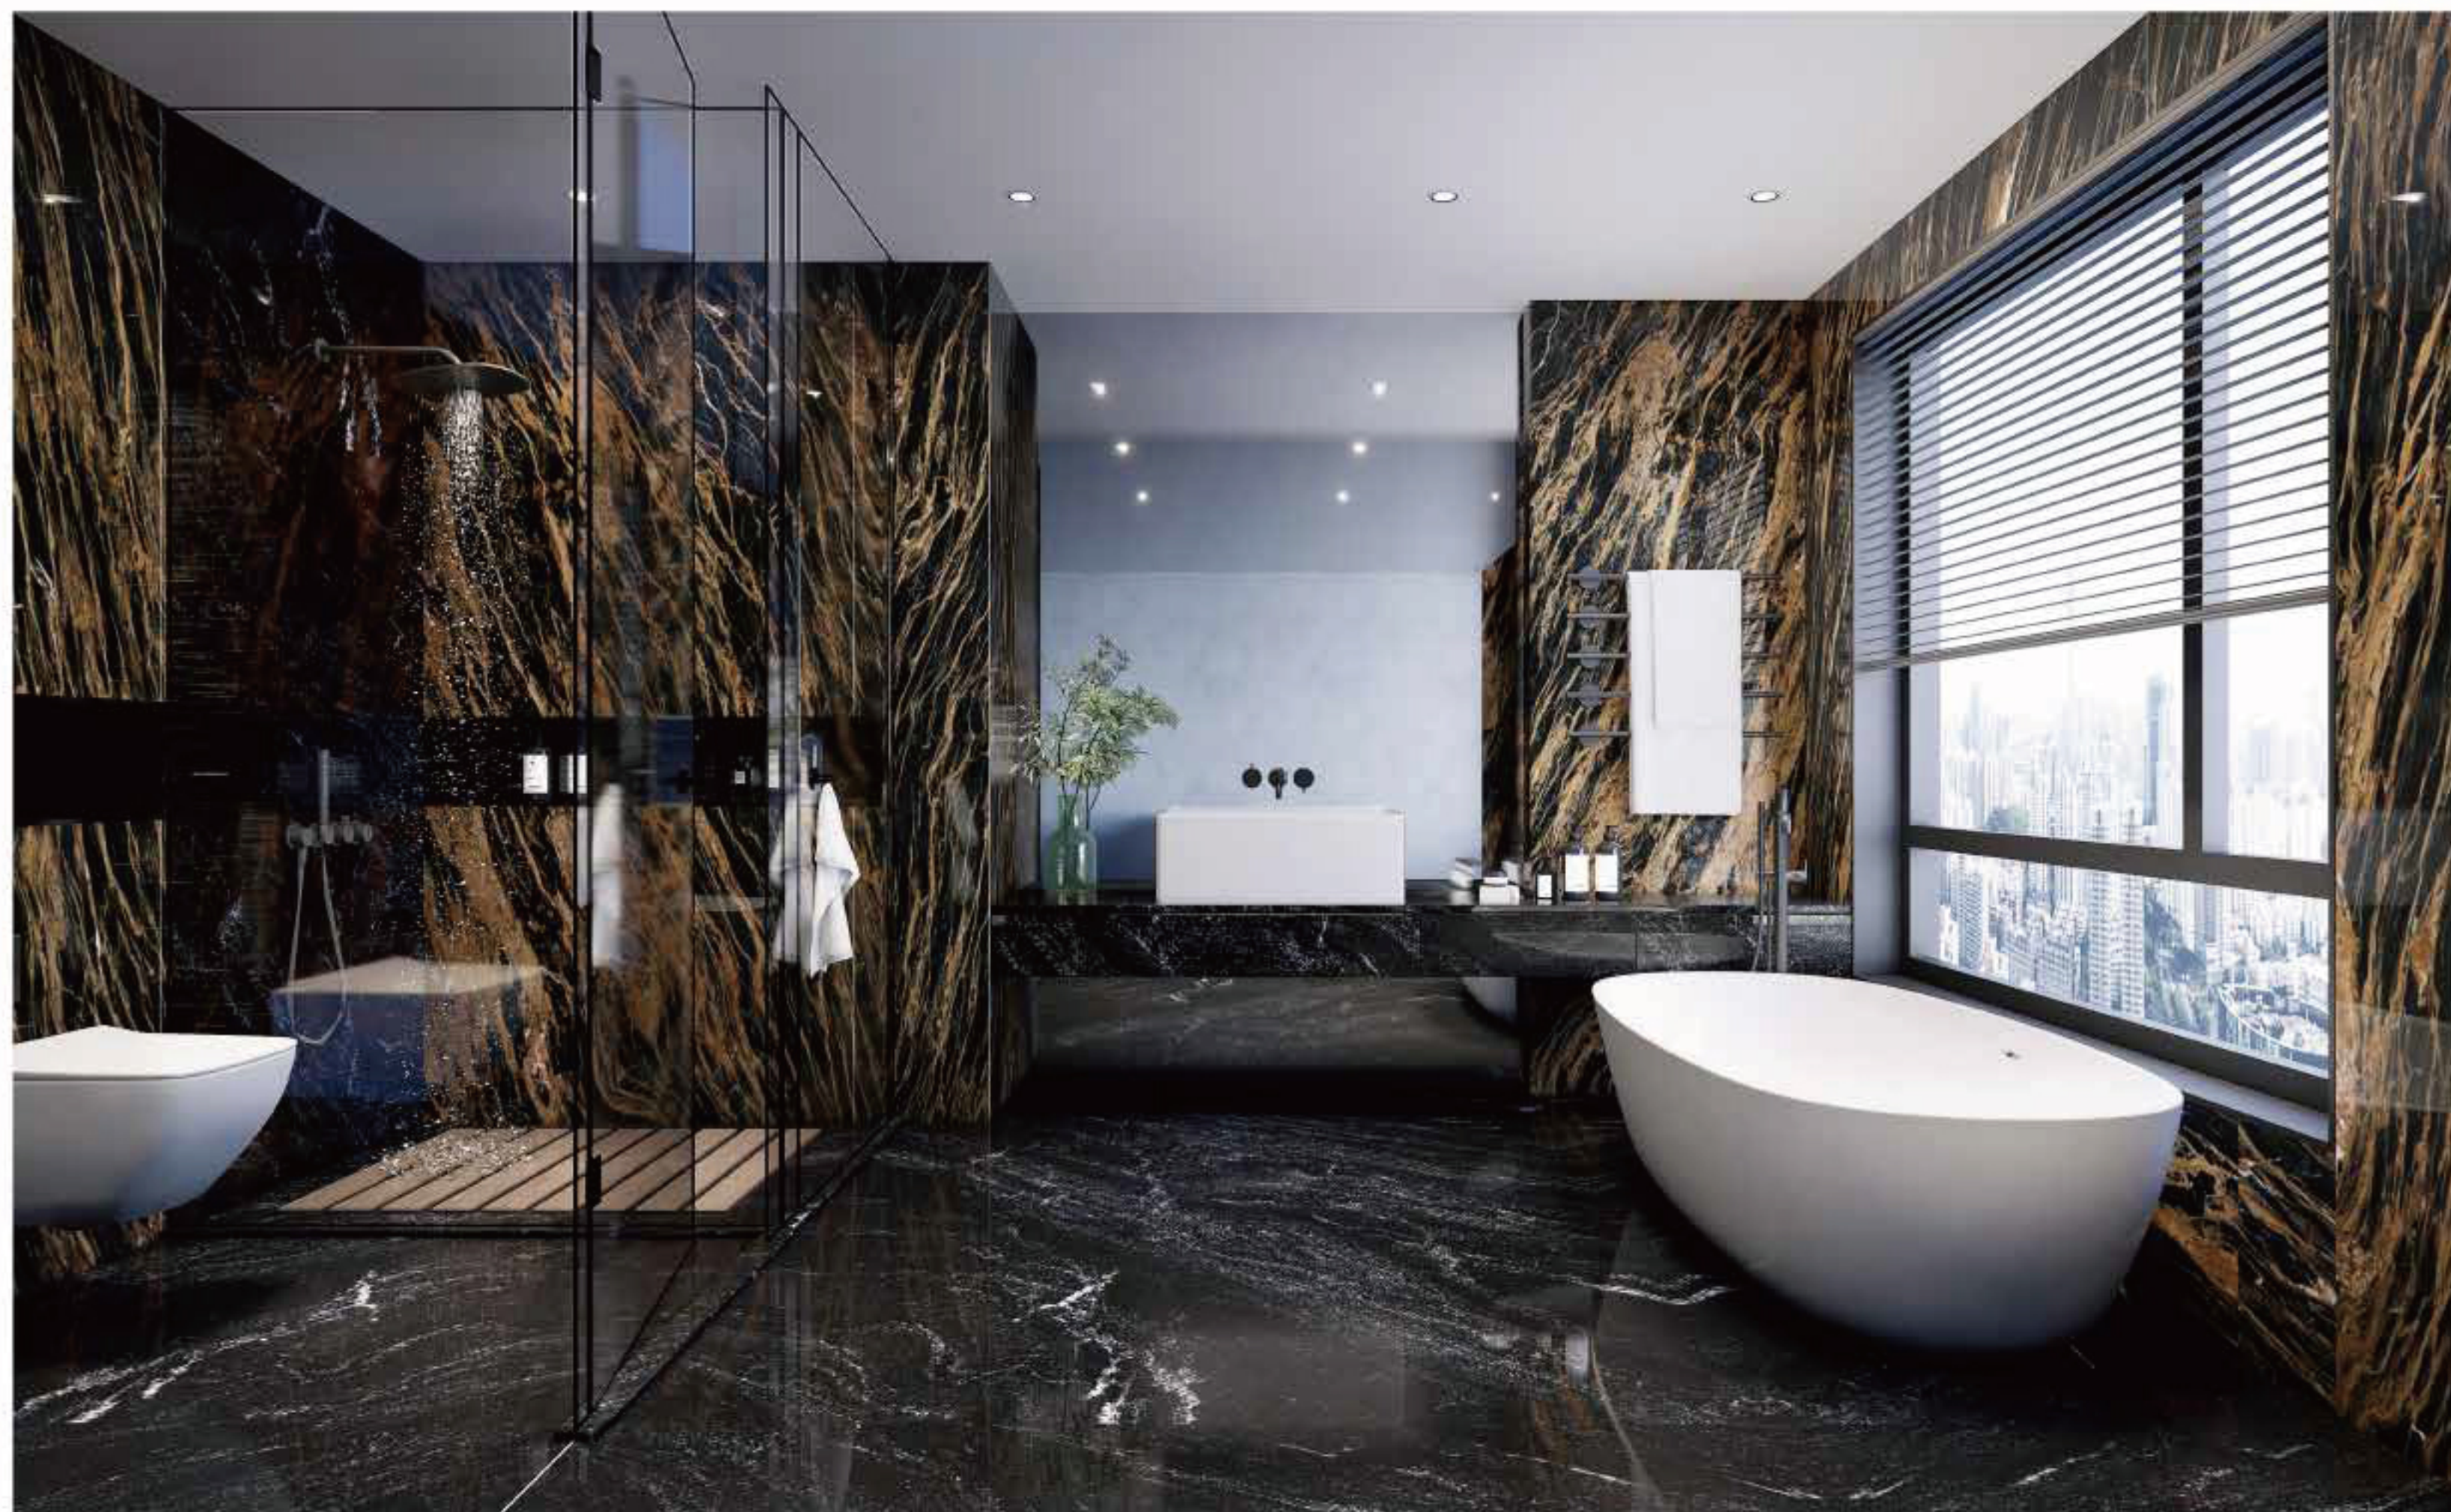

Technical Features

技术特性

BEYOND ARTS FASHION

PHYSICAL PROPERTIES	REGULATION	REQUIRED VALUE	MOREROOM AVERAGE VALUES
DIMENSIONS	ISO 10545-2	± 0,6% max lenght and width	± 0,1% lenght and width
		± 5% max Thickness	± 5% Thickness
		± 0,5% max Linearity	± 0,1% Linearity
		± 0,5% max Wedging	± 0,1% Wedging
		± 0,5% max Warpage	± 0,2% Warpage
WATER ABSORPTION	ISO 10545-3	≤ 0,5 %	0.05% - 0.08%
MODULS OF RUPTURE (R)	ISO 10545-3	≥ 35 N/mm2	49 N/mm2
BREAKING STRENGHT (S)	ISO 10545-4	< 7,5mm = ≥ 700 N	Conforms
DEEP ABRASION RESISTANCE	ISO 10545-6	max 175 mm3	140 mm3
COEFFICIENT OF	ISO 10545-8	9x10-6°C-1	6,5x10-6°C-1
LINEAR THERMAL EXPANSION			
RESISTANCE TO THERMAL SHOCKS	ISO 10545-9	No sample must show alterations to surface	Available on request
FROST RESISTANCE	ISO 10545-12	No sample must show alterations to surface	Available on request
RESISTANCE TO CHEMICAL PRODUCTS	ISO 10545-13	Resistance to household chemicals and pool additives (min. class B)	A
		Resistance to acids and alkalis at low concentration	LB
		Resistance to highly concentrated acid and alkaline products	HB
STAIN RESISTANCE	ISO 10545-14	No sample must show alterations to surface	Stains removed by hot water (without detergent)
RESISTANCE TO LIGHT	DIN 51094	No sample must show alterations to surface	No change in brightness or colour of samples
FRICTION COEFFICIENT	BCRA REP CEC 6/81	0.40≤μ≤0.74	>0.4
REACTION TO FIRE	96/603/CE	Not applicable	A1 – A1FL
NOTES	*The slip resistance, static or dynamic coefficient of friction values shown in the catalog and in the Safe System table are to be considered purely indicative and not binding. Any specific need must be confirmed by us at the time of the order and in any case always before installation.		

Product performance

产品性能

Moreroom passes the certifications including ISO 9001 | ISO 50001 | ISO 14001 | EU EMAS | GREENGUARD | CCC | LEED | AEO, etc. From raw materials purchasing, monitoring of the production process, and the delivery of finished products, all the accusations of people, machines, materials, and procedures are strictly controlled in digitization, dramatization, and standardization. With international certification, Moreroom products are more environmental-friendly and healthy, providing people with a safe and methanol-free environment.

Moreroom通过ISO 9001 | ISO 50001 | ISO 14001 | 欧盟EMAS | GREENGUARD | CCC | LEED | AEO认证，从原料进厂、生产过程监控、成品出厂所有环节的人、机、料、法各指控点都进行批量化、数据化、标准化严格控制，具备国际权威认证，产品环保健康，更加安全，能够给予人们健康、安全、无甲醇的环境。



ULTRA-REALISTIC
超逼真



TOUGHNESS
超强韧性



6+MOHS HARDNESS
6+级莫氏硬度



10+COLOR CHANNELS
10色彩通道



RICH COLORS &TEXTURE
花色丰富



FOOD GRADE SURFACE
食品级表面



WATERPROOF
抗渗



SCRATCH RESISTANT
耐划刮



RESISTANT TO HIGH
TEMPERATURES
耐高温



EASY TO CLEAN
易于清洁



HYGIENIC
卫生



100% NATURAL
100%天然




RESISTANT TO UV RAYS
防紫外线



RECYCLABLE
可循环



LIGHTWEIGHT
轻盈



RESISTANT TO BENDING
抗弯折



与我们联系

Contact Us



FOSHAN MONO BUILDING MATERIAL CO.,LTD.
MOREROOM STONE CO., LTD.

Marketing Center: No.1 Building, West Area, Green Plaza, No.129
Jihua West road, Foshan City, Guangdong, China
Manufacturing Add: No.325 National Highway, Xiadong County,
Yunfu City, Guangdong, China