

IRON COPPER

黑锈石

MN762C

DESCRIPTION

微光黑如墨时幽的深邃感，结合锈石的细腻质感，是摩登奢华与工业美学相融合的产物，展示时光停留在某一时刻的永恒艺术。

Dim light black highlights the advanced sense of fashion. When combined with the delicate texture of rust stone, it becomes the integration of Italian aesthetics and industrial aesthetics, showing the eternal art of time.

SPECIFICATION

Size: 1200X2700X6mm
108" X 48" X 1/4"


耀光面 / Satin(Matt)




ITEM NO.

MN762CPZ71 206

FACE CONTINUITY

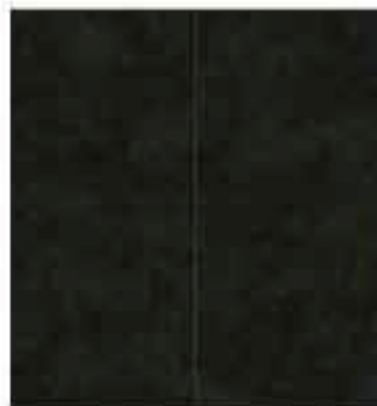

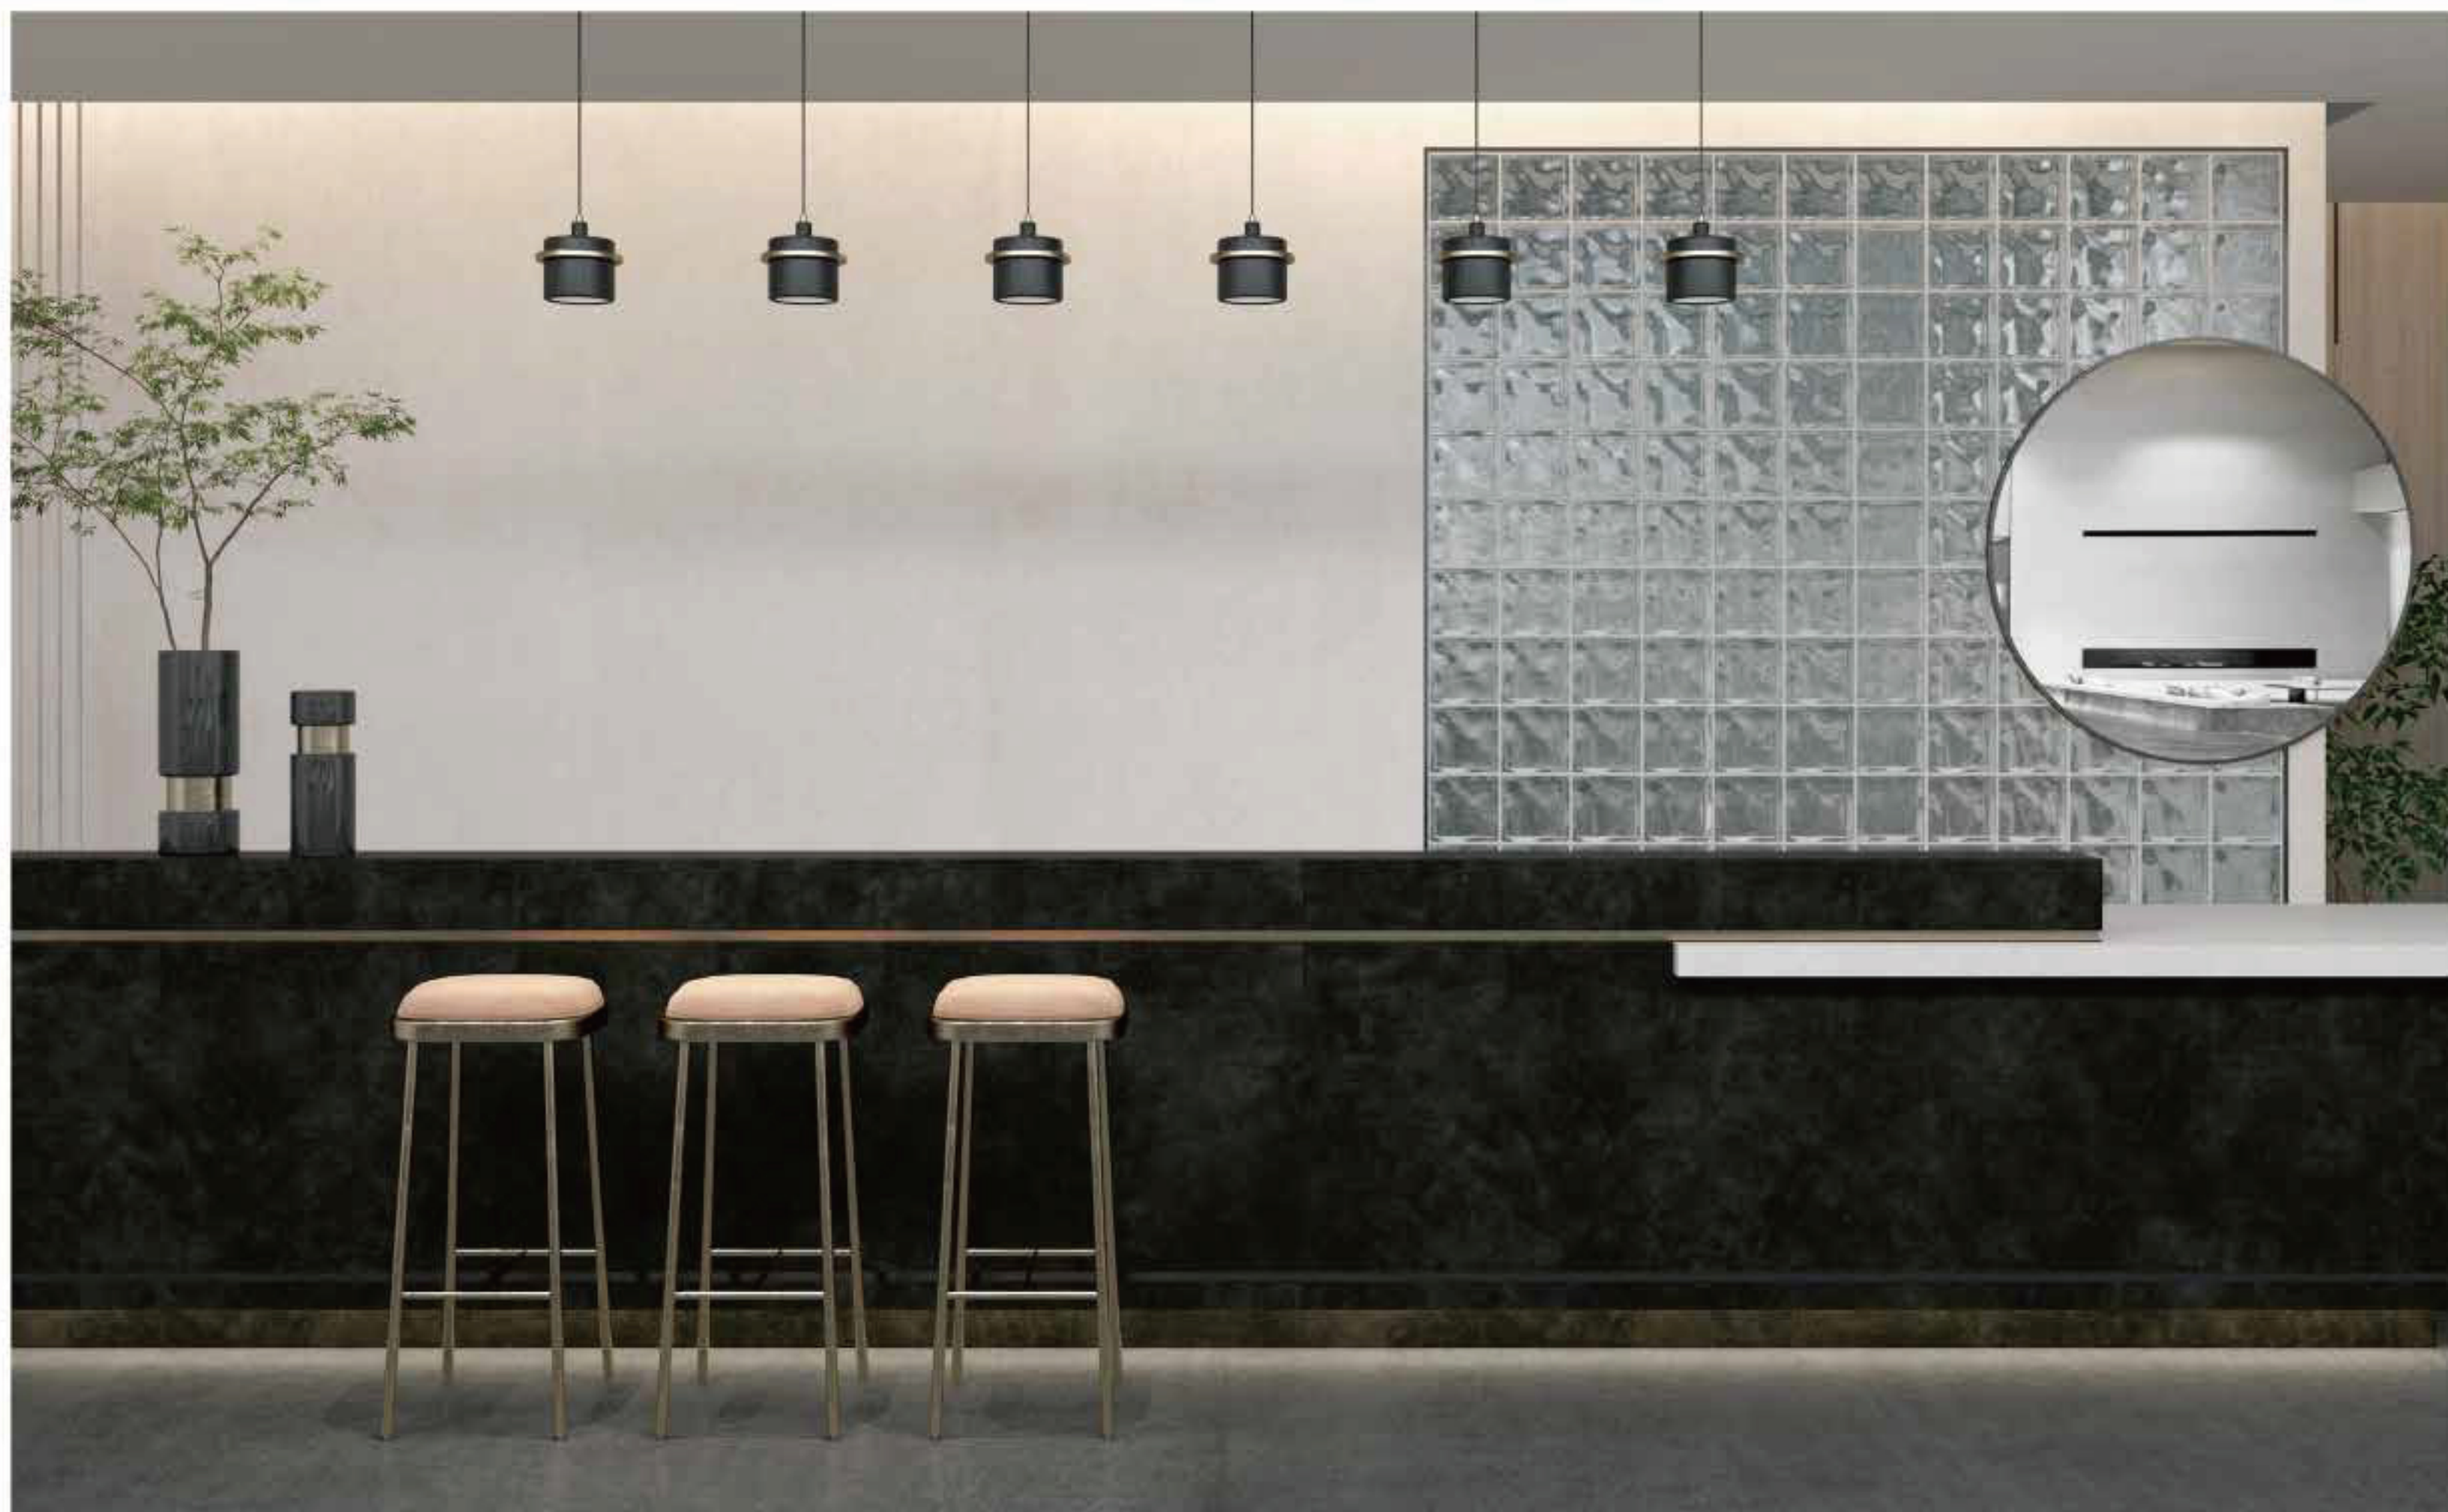

Technical Features

技术特性

BEYOND ARTS FASHION

PHYSICAL PROPERTIES	REGULATION	REQUIRED VALUE	MOREROOM AVERAGE VALUES
DIMENSIONS	ISO 10545-2	± 0,6% max length and width	± 0,1% length and width
		± 5% max Thickness	± 5% Thickness
		± 0,5% max Linearity	± 0,1% Linearity
		± 0,5% max Wedging	± 0,1% Wedging
		± 0,5% max Warpage	± 0,2% Warpage
WATER ABSORPTION	ISO 10545-3	≤ 0,5 %	0.05% - 0.08%
MODULUS OF RUPTURE (R)	ISO 10545-3	≥ 35 N/mm ²	49 N/mm ²
BREAKING STRENGTH (S)	ISO 10545-4	< 7,5mm = ≥ 700 N	Conforms
DEEP ABRASION RESISTANCE	ISO 10545-6	max 175 mm ³	140 mm ³
COEFFICIENT OF LINEAR THERMAL EXPANSION	ISO 10545-8	9x10 ⁻⁶ °C ⁻¹	6,5x10 ⁻⁶ °C ⁻¹
RESISTANCE TO THERMAL SHOCKS	ISO 10545-9	No sample must show alterations to surface	Available on request
FROST RESISTANCE	ISO 10545-12	No sample must show alterations to surface	Available on request
RESISTANCE TO CHEMICAL PRODUCTS	ISO 10545-13	Resistance to household chemicals and pool additives (min. class B)	A
		Resistance to acids and alkalis at low concentration	LB
		Resistance to highly concentrated acid and alkaline products	HB
STAIN RESISTANCE	ISO 10545-14	No sample must show alterations to surface	Stains removed by hot water (without detergent)
RESISTANCE TO LIGHT	DIN 51094	No sample must show alterations to surface	No change in brightness or colour of samples
FRICITION COEFFICIENT	BCRA REP CEC 6/81	0.40 ≤ μ ≤ 0.74	>0.4
REACTION TO FIRE	96/603/CE	Not applicable	A1 – A1FL
NOTES	*The slip resistance, static or dynamic coefficient of friction values shown in the catalog and in the Safe System table are to be considered purely indicative and not binding. Any specific need must be confirmed by us at the time of the order and in any case always before installation.		

Product performance

产品性能

Moreroom passes the certifications including ISO 9001 | ISO 50001 | ISO 14001 | EU EMAS | GREENGUARD | CCC | LEED | AEO, etc. From raw materials purchasing, monitoring of the production process, and the delivery of finished products, all the accusations of people, machines, materials, and procedures are strictly controlled in digitization, dramatization, and standardization. With international certification, Moreroom products are more environmental-friendly and healthy, providing people with a safe and methanol-free environment.

Moreroom通过ISO 9001 | ISO 50001 | ISO 14001 | 欧盟EMAS | GREENGUARD | CCC | LEED | AEO认证, 从原料进厂、生产过程监控、成品出厂所有环节的人、机、料、法各指控点都进行批量化、数据化、标准化严格控制, 具备国际权威认证, 产品环保健康, 更加安全, 能够给予人们健康、安全、无甲醇的环境。



 ULTRA-REALISTIC 超逼真	 TOUGHNESS 超强韧性
 6+MOHS HARDNESS 6+级莫氏硬度	 10+COLOR CHANNELS 10色彩通道
 RICH COLORS &TEXTURE 花色丰富	 FOOD GRADE SURFACE 食品级表面
 WATERPROOF 抗渗	 SCRATCH RESISTANT 耐划刮
 RESISTANT TO HIGH TEMPERATURES 耐高温	 EASY TO CLEAN 易于清洁
 HYGIENIC 卫生	 100% NATURAL 100%天然
 RESISTANT TO UV RAYS 防紫外线	 RECYCLABLE 可循环
 LIGHTWEIGHT 轻盈	 RESISTANT TO BENDING 抗弯折



MOREROOM
·STONE·
Beyond Arts Fashion



与我们联系

Contact Us



FOSHAN MONO BUILDING MATERIAL CO.,LTD.
MOREROOM STONE CO., LTD.

Marketing Center: No.1 Building, West Area, Green Plaza, No.129
Jihua West road, Foshan City, Guangdong, China
Manufacturing Add: No.325 National Highway, Xiadong County,
Yunfu City, Guangdong, China